


DISC SWING RIDE - VOLADOR


Catalogue number: 2209

It shall apply from: 15-06-2020


Max. free fall height:	0,7 m
Product Dimensions: (length x width x height)	5,63 x 5,63 x 3,80 m
Impact area (length x width)	Ø9,13 m (Ø11,13m)
Free zone	65,5 m ² (97,3 m ²)

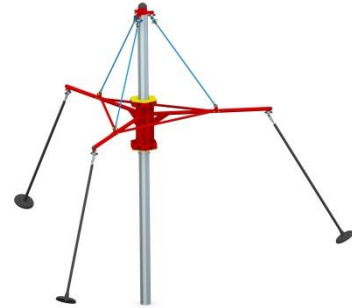

Product dimensions

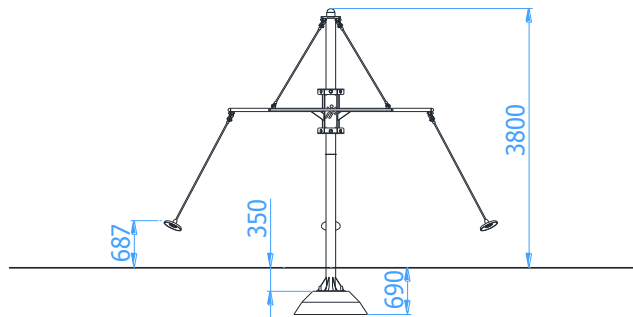

Impact area dimensions

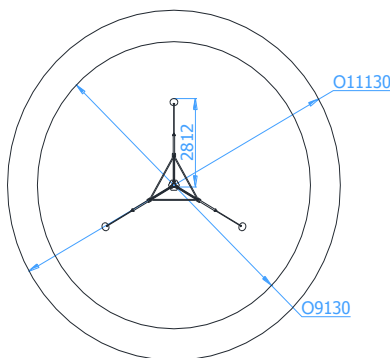

Acceptable shock-absorbing surface:

- Bark – grain size 20 do 80 mm, min. depth 200 mm + 100mm
- Woodchip – grain size 5 do 30 mm, min. depth 200mm + 100mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm + 100mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm+ 100mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- After winding-up, the roundabout performs an automatic rotational movement
- Construction made of stainless steel pipe (Ø133x4mm) and steel pipe (Ø48,3x2,9mm; Ø30x2mm)
- Roundabout equipped with rubber seats
- Swing hanging chain covered with rubber cover
- All steel elements are protected against corrosion and painted with an acrylic lacquer
- The set includes a foundation made of concrete of class C25/30 which make installation easier
- Apart from the impact area , it should also be taken into account that the area free from other items shall spread about one metre minimum (altogether Ø11130 mm)

Product visualization

TECHNICAL DATA SHEET

